




Jawbone Big Jambox Button Panel Replacement

Prerequisite Only. How to remove the button panel, which is part of the outside casing of the Jambox.

Written By: Gabriella Graham

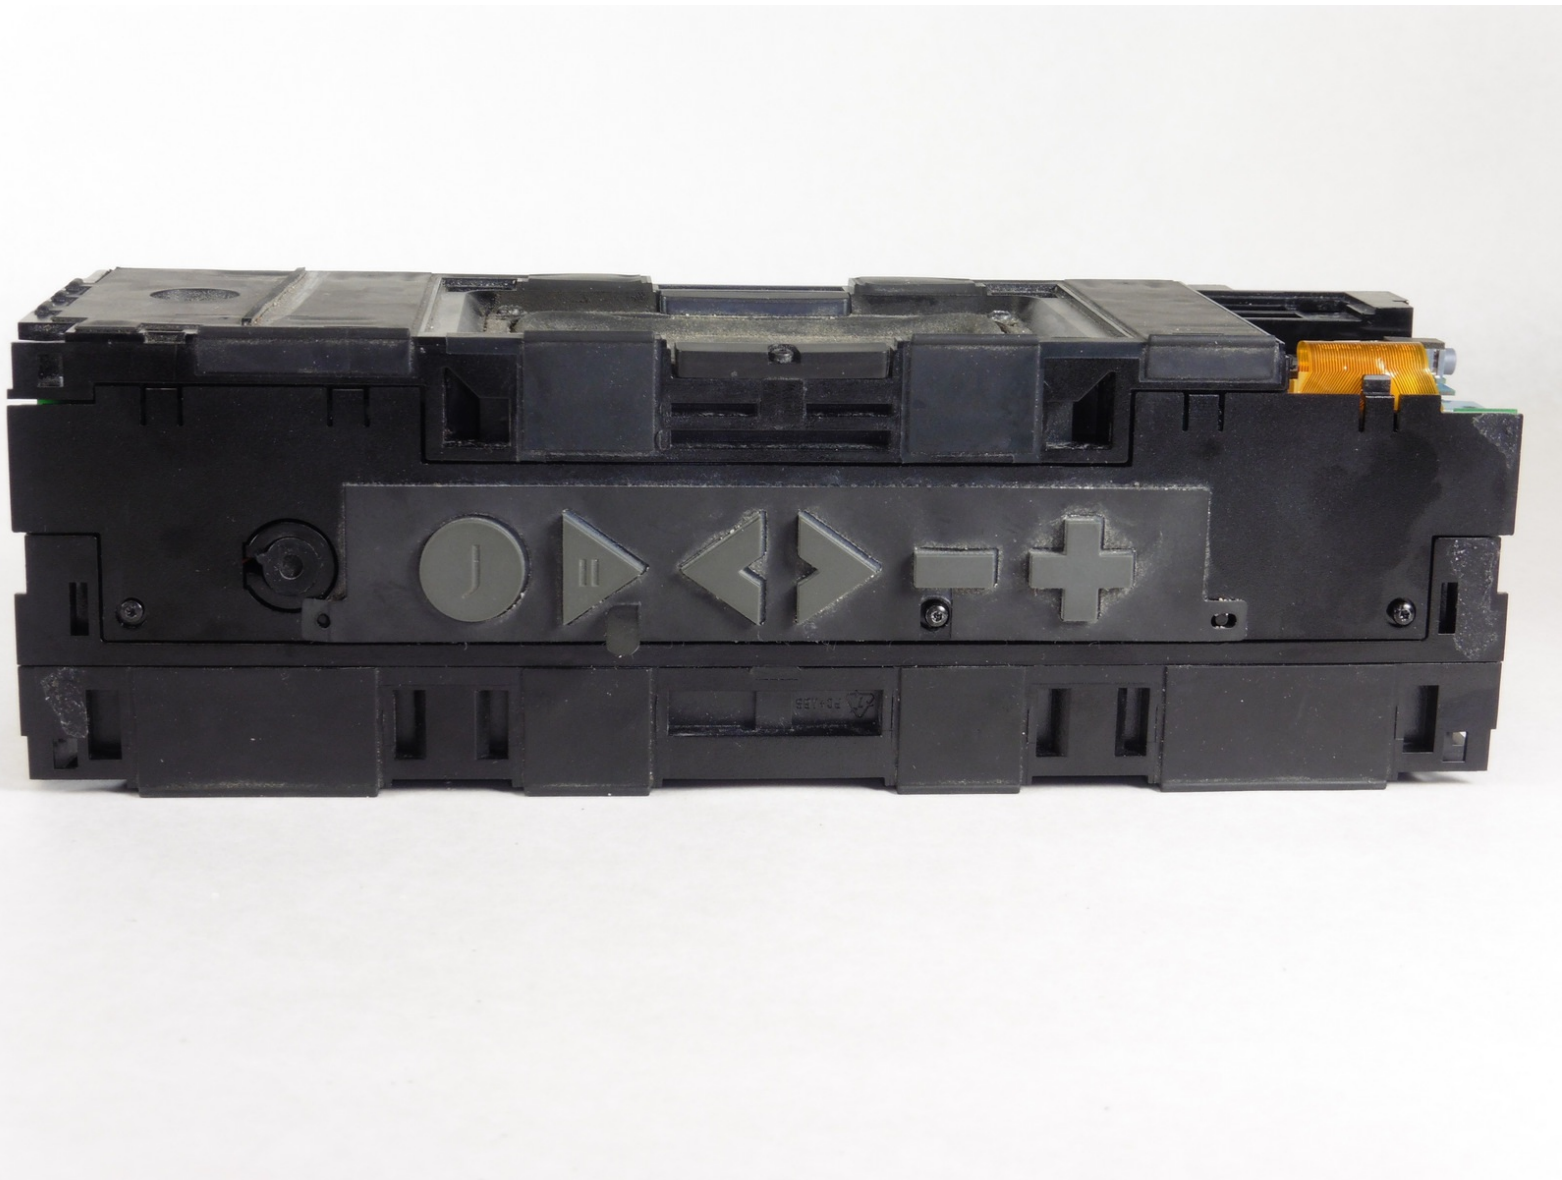

INTRODUCTION


This is a guide to remove the button panel, which must be removed to gain access to the circuit board and remove the auxiliary board.



TOOLS:



- [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Outer Case

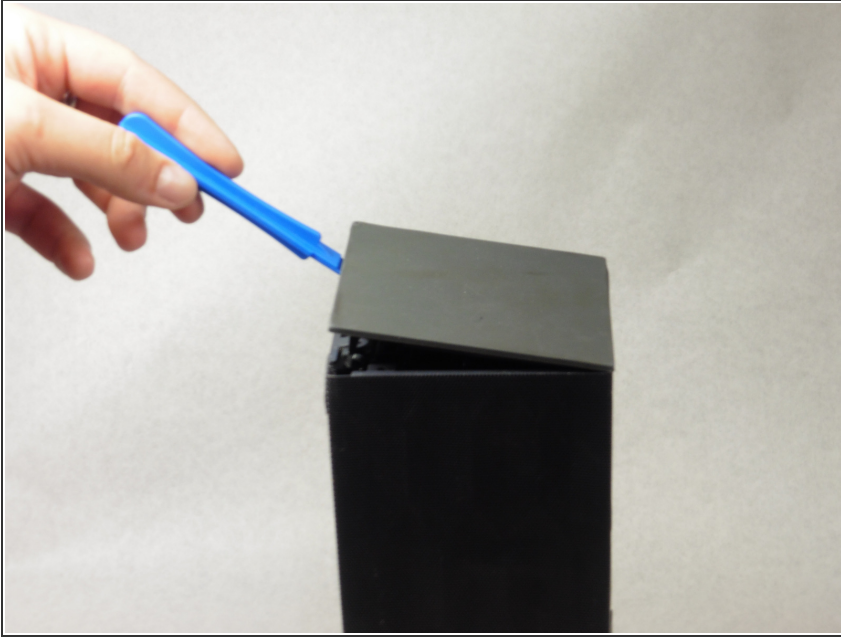


- Remove both end caps by putting a plastic opening tool in the center of the seam. Work around the edges to pry the end caps off completely.
- ⓘ Due to interior clips holding the end caps in place, use caution when applying force.

Step 2

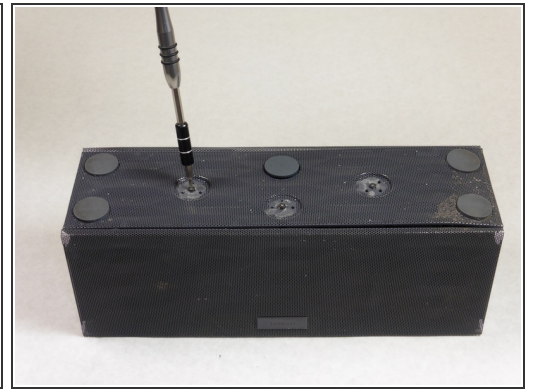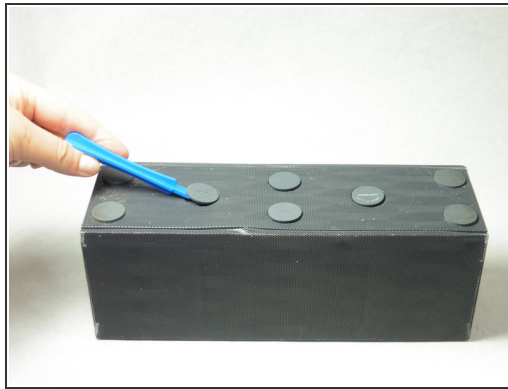


- Turn the Jambox upside down. Peel the indicated rubber tabs off, using a plastic opening tool if necessary.
- ⓘ You may want to only take the tabs half way off to avoid re-gluing when reassembling.
- Use a screwdriver to remove the three T6, 7.0 mm screws under each rubber tab.
- ✦ Because the screws are a different length, set the screws aside.

Step 3

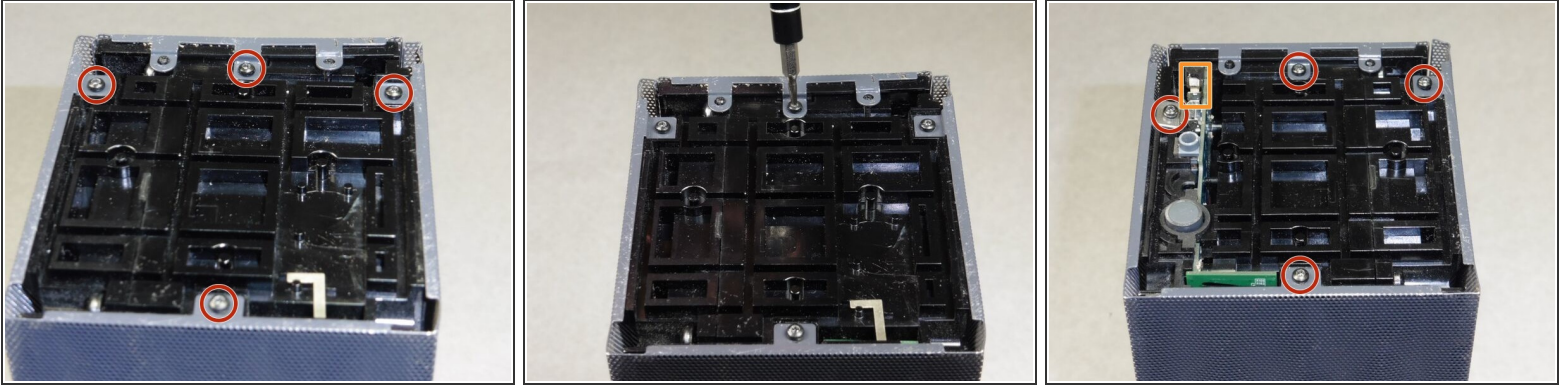


- With the Jawbone logo facing towards you and with correct orientation, place the Jambox with the left end cap facing upward.
- Unscrew indicated T6 9.7 mm screws.
- Flip the Jambox so the other end cap is facing up. The USB cable is on this side (metal grounding clip, indicated in orange). Repeat the above step.

Step 4

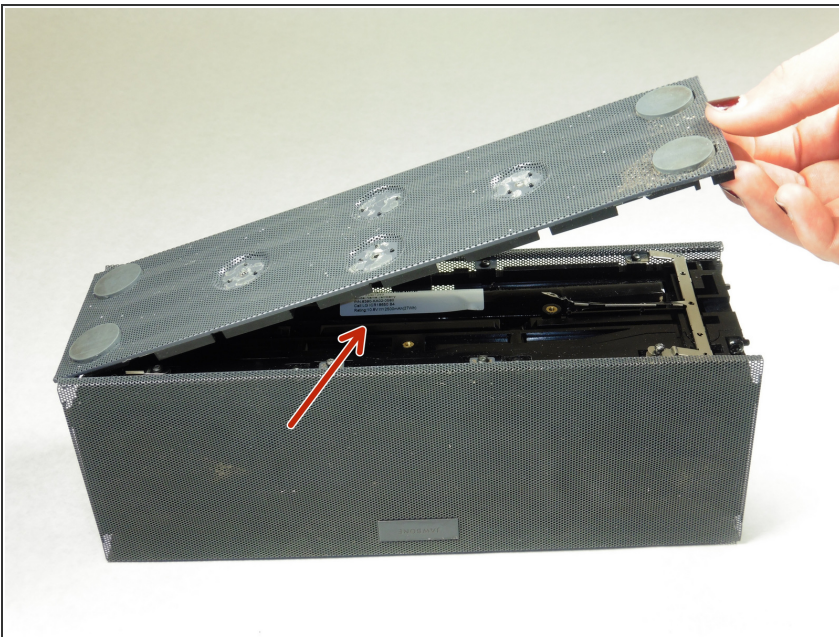

- Pry up the bottom panel by lifting from the device.
- Pull the bottom up. This may take a bit of force as the bottom is glued to device.
- Once removed, the battery will now be visible.


Step 5

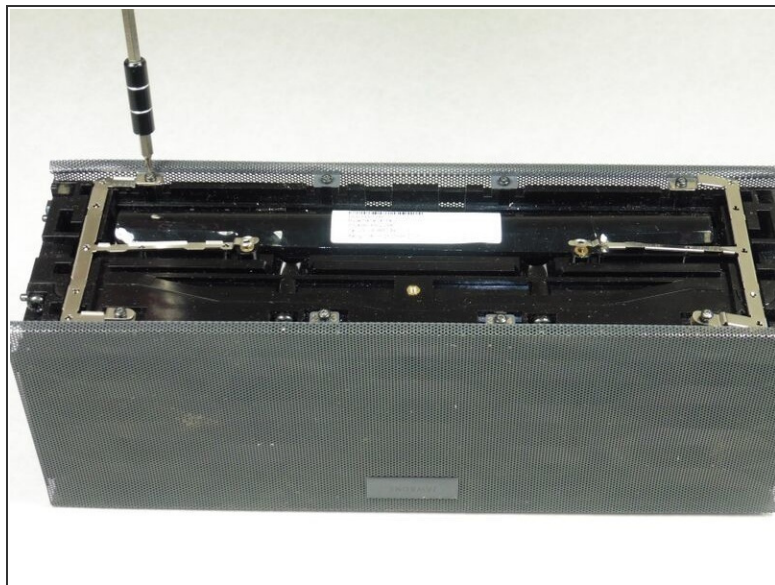

i Before unscrewing, take a picture of the top view. That way, when you're reassembling the device, you'll know the orientation of the metal grounding plates.


- Unscrew the eight indicated T6 9.8 mm screws. Remove metal grounding plates.

Step 6

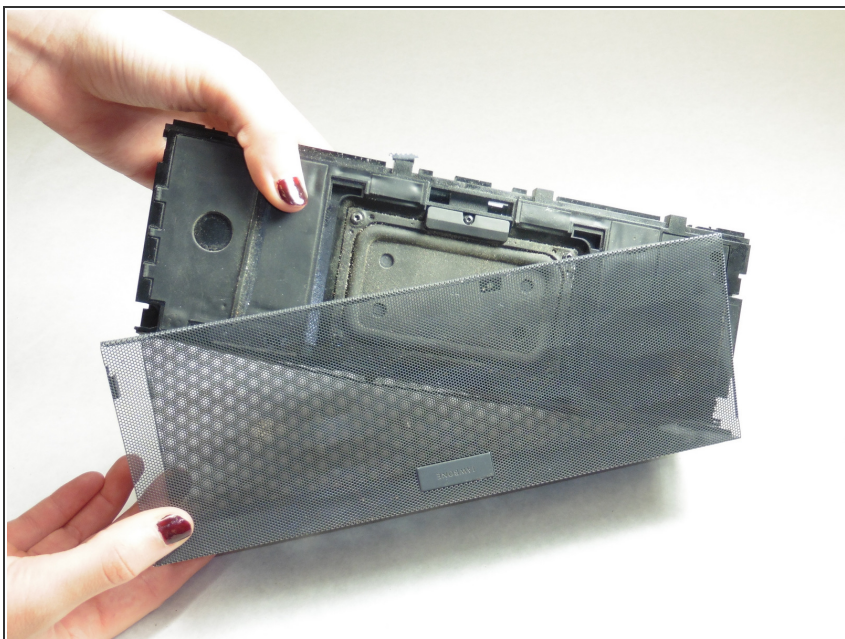



- Once all eight screws are removed, pry the sides of the Jambox to lift the body from it's shell.

Step 7

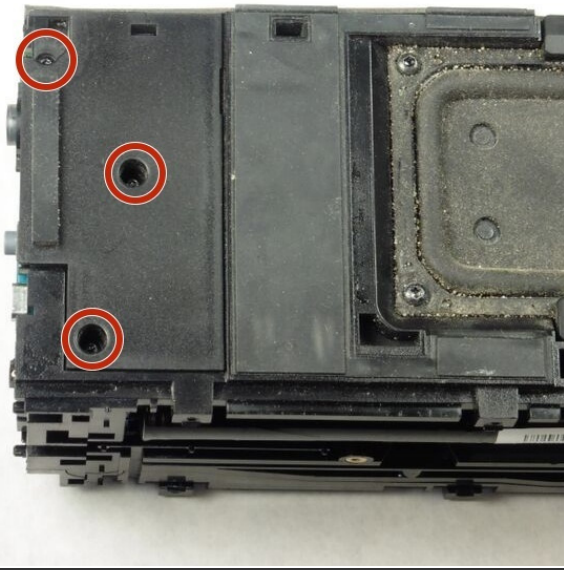


- With the battery facing forward, remove the three indicated T6 9.5 mm screws.
- Once the screws are removed, lift up the small plastic plate, revealing the auxiliary board underneath.

Step 8 — Button Panel

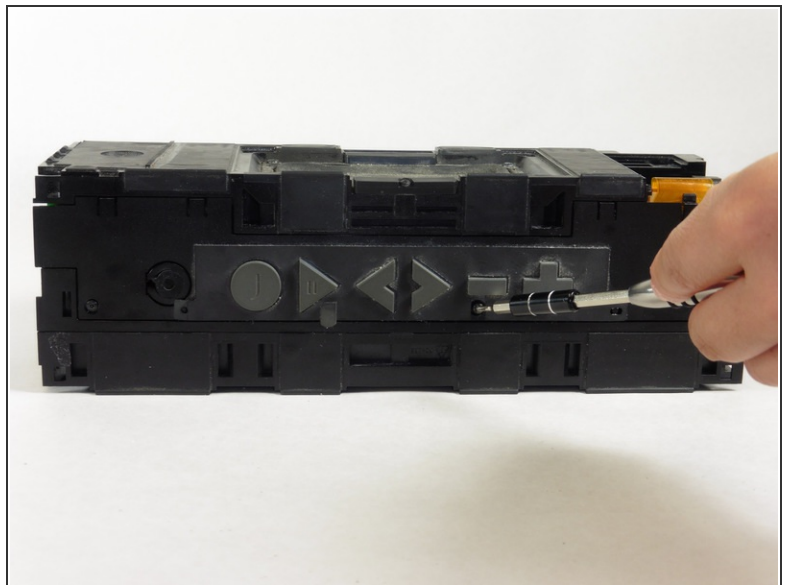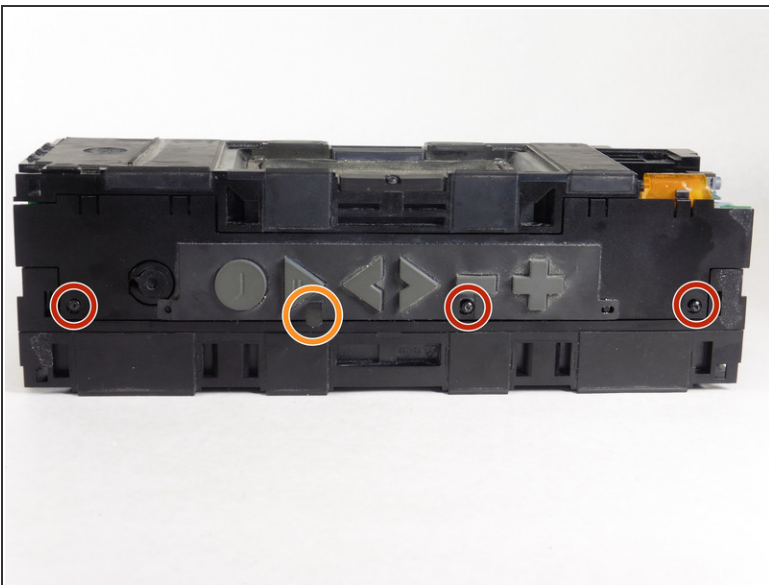



- Turn the Jambox so that the button panel is visible.
- Remove the indicated screws, T6 9.6 mm.
- *i* There is a small plastic flap obscuring the view of one of the screws, indicated in orange. In order to unscrew it, simply lift the flap out of the way.

Step 9

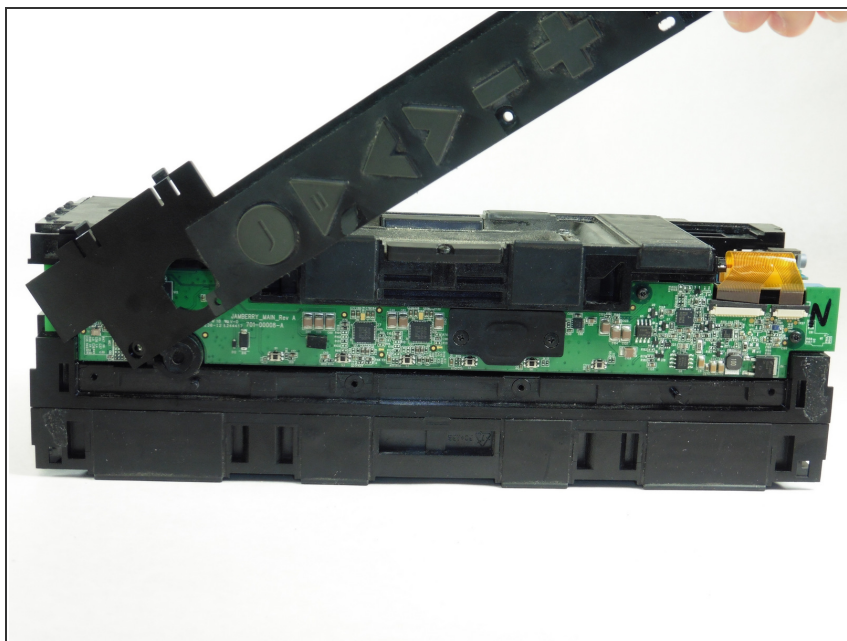

- Pop off the button panel.

Step 10

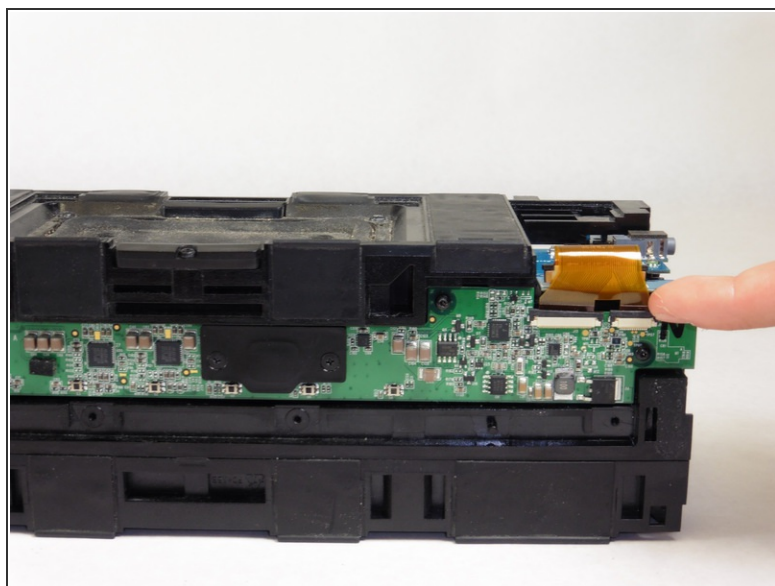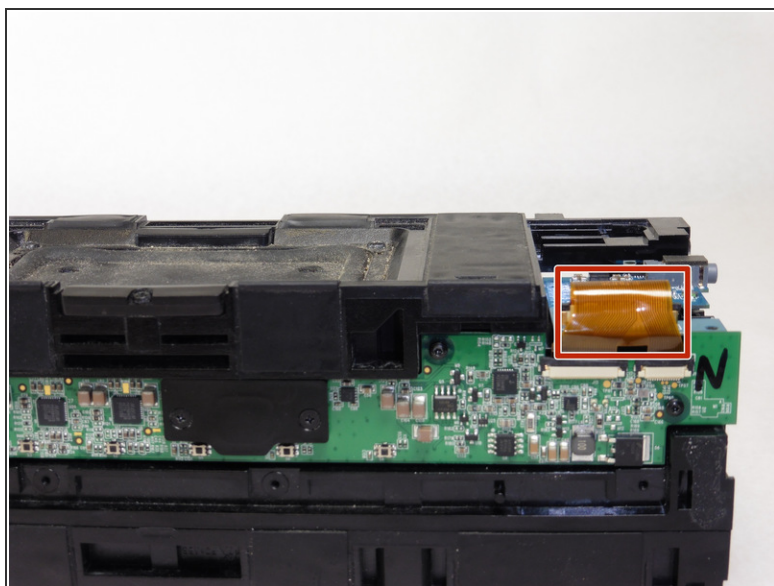

- Remove the colored ribbon that connects the green button circuit board to the blue auxiliary board by using your finger to lift the small black tabs that clamp down the ribbon.

To reassemble your device, follow these instructions in reverse order.

